




Mounting Suggestions: 2013-2014 Yamaha Bolt Solo Seats

Tools needed: 10mm socket wrench

Removal of Stock Seat:

1. Insert the ignition key into the left side panel below the seat. Turn the key clockwise and gently pull the panel's plunger pin out of the body to remove the panel.
2. Using a 10mm socket wrench, remove the bolt which secures the forward seat bracket from the frame. (fig. 1)
3. Lift the nose of the seat and slide forward to remove the solo seat.

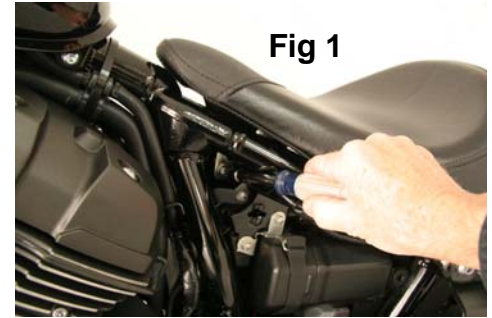

Installation of Mustang Seat:

Note: If you are using both a solo and a passenger seat, the passenger seat must be installed before the solo.

1. Engage the Mustang solo seat's rear bracket into the stock mounting bracket and lower the nose of the seat into place. The forward seat bracket will drop into the frame receptacle behind the tank.
2. Re-install and secure the stock bolt into the frame with a 10mm socket wrench.
3. Replace the left side panel and secure by turning the ignition key counter-clockwise. (fig. 2)



Enjoy the comfort and custom look of your new Mustang seat!

These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Refers to part numbers:
75691, 75693, 79830, 79832

