

## INSTALLATION INSTRUCTIONS

### DILLINGER LUGGAGE RACK, SILVER

6664

#### THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Luggage Rack
- 1 Left Mount
- 1 Right Mount
- 4 1/4-20 x 1/2" Socket Button Head Cap Screw

#### YOU WILL ALSO NEED:

Hex wrench set, torx wrench bit set, combination wrench set, torque wrench (FT/LBS)

PICTURES SHOWN ARE OF THE BLACK PARTS. INSTALLATION OF THE SILVER PARTS WILL BE THE SAME.

**NOTICE** THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.



**STEP 2** Refer to PIC 2. Locate provided Luggage Rack. Set it upside down on a flat clean surface.

**STEP 3** Refer to PIC 3. Locate provided Left Mount. Align and place the bent panel of the mount on top of the mounting holes of the luggage rack.

*Note: The side with the bent panel and clear plastic film will face in towards the rack and bike. The notched out section of the mount, that fastens to the rear fender area, should be directed towards the rear of the rack.*

**STEP 4** Refer to PIC 3 and 4. Locate two (2) provided screws. Lightly fasten the mount to the luggage rack.

**STEP 5** Refer to PIC 4. Locate provided Right Mount. Repeat Steps 3 and 4 for fastening the mount to the luggage rack.

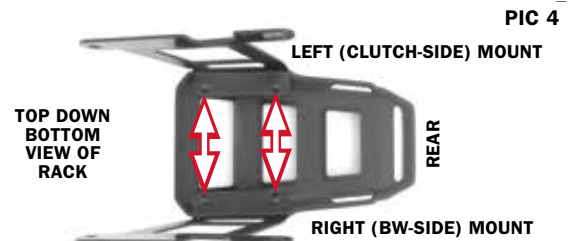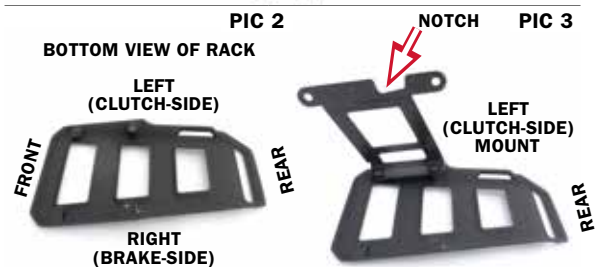

**KURYAKYN.COM**

866 277 9598 | INFO@KURYAKYN.COM

454 COUNTY ROAD VV SOMERSET, WI 54025

## INSTALLATION INSTRUCTIONS

### DILLINGER LUGGAGE RACK, SILVER

6664

-CONTINUED-

**STEP 6** Refer to PIC 5. Remove the existing rear fender support bolts and lock nuts, and loosen the rear turn signals. Set hardware aside, it will be reused.

*Note: Refer to service manual for assistance with the loosening of the rear turn signals.*

**STEP 7** Align and test fit the luggage rack over the rear fender. Adjust the spacing between the mounts in or out as needed. Take the luggage rack assembly off and fully tighten the mounts into position.

**STEP 8** Refer to PIC 6 and 7. Slide the mounts of the luggage rack between the rear fender and rear fender support. Be sure the notches on the bottom of the mounts slide over the top of the rear turn signal light's wire and hardware. Align the mounting holes of the rear fender support, mounts, and rear fender.

*Note: Be sure the rear turn signal light's wire is not bent or pinched.*

**STEP 9** Refer to PIC 8. Locate the hardware that was removed in Step 6. Fasten the rear fender support and the mounts to the rear fender. Fully tighten all hardware.

**TORQUE VALUE FOR REAR FENDER SUPPORT SCREW:**  
12-18 FT-LBS (16.3-24.4 NM)

**STEP 10** Fully tighten the rear turn signals.

#### CAUTION

NEVER EXCEED THE MANUFACTURER'S RECOMMENDED LOAD CAPACITY. EXCESS LOADING ON THE LUGGAGE RACK COULD CAUSE DAMAGE TO YOUR MOTORCYCLE, LOSS OR INJURY. KURYAKYN IS NOT RESPONSIBLE FOR ANY DAMAGE, LOSS, OR INJURY CAUSED BY EXCEEDING THE MANUFACTURER'S LOAD CAPACITY.

#### NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

LEFT (CLUTCH) SIDE VIEW

PIC 5



PIC 6

PIC 7



PIC 8



## INSTALLATION INSTRUCTIONS

### DILLINGER LUGGAGE RACK, SILVER

6664

-CONTINUED-

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

#### ©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice).

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice)