

Assembly Instructions

Model:	KLZ1000B
Description:	Bag Fitting Kit
Part Number:	99994-0530


Before you begin, read through these instructions and check that all parts are present. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.

Kawasaki recommends that all genuine accessories should be fitted by an authorized Kawasaki dealer.

The following symbol indicates the information for proper installation and operation in this instruction.

NOTE : NOTE indicates information that may help or guide you in the operation or service of the vehicle.

Parts List				
No.	Component Name	Part No.	Qty	Remark
1	Bracket	11056-7047	1	Right
2	Bracket	11056-7046	1	Left
3	Damper	92161-1551	1	Right
4	Damper	92161-1550	1	Left
5	Guard	55020-1824	1	Right, Rear
6	Guard	55020-1823	1	Left, Rear
7	Guard	55020-0982	1	Right, Front
8	Guard	55020-0981	1	Left, Front
9	Bolt	92153-1948	4	

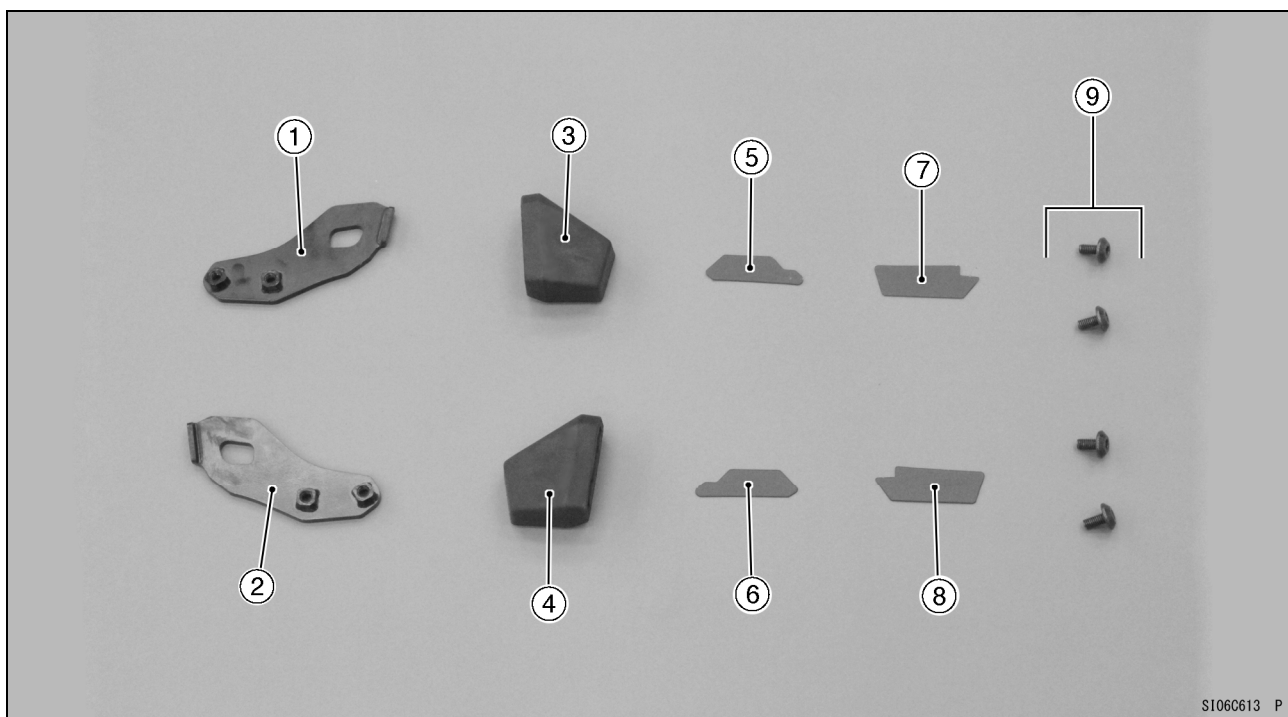


S106C613 P


Installation Instructions

Assembly Procedure

- Install the bracket [2].
- Tighten the bolts [9] securely.

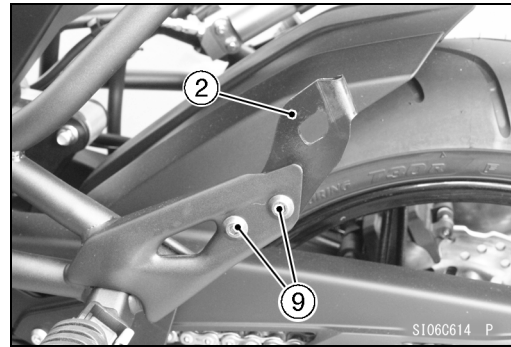


- Install the damper [4] so that the “L” mark side [A] faces inward.

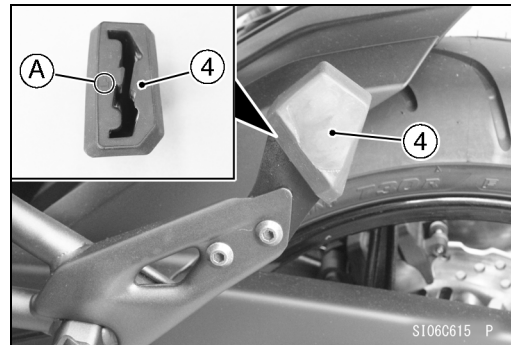

- Install the guards [6] [8].

NOTE

- The right side bag fitting kit installation is the same as for left side.

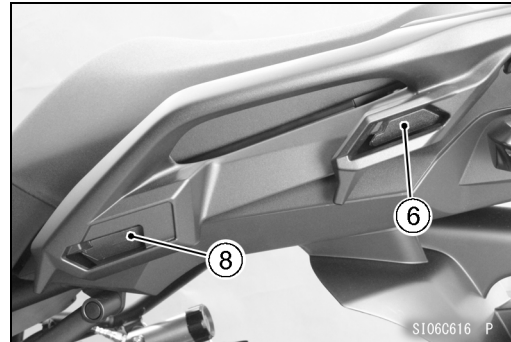

Basic Torque for General Fasteners

The table below, relating tightening torque to thread diameter, lists the basic torque for the bolts and nuts. Use this table for only the bolts and nuts which do not require a specific torque value. All of the values are for use with dry solvent-cleaned threads.

Threads dia. (mm)	Torque		
	N·m	kgf·m	ft·lb
5	3.4 ~ 4.9	0.35 ~ 0.50	30 ~ 43 in·lb
6	5.9 ~ 7.8	0.60 ~ 0.80	52 ~ 69 in·lb
8	14 ~ 19	1.4 ~ 1.9	10 ~ 13.5
10	25 ~ 34	2.6 ~ 3.5	19 ~ 25
12	44 ~ 61	4.5 ~ 6.2	33 ~ 45
14	73 ~ 98	7.4 ~ 10.0	54 ~ 72
16	115 ~ 155	11.5 ~ 16.0	83 ~ 115
18	165 ~ 225	17.0 ~ 23.0	125 ~ 165
20	225 ~ 325	23.0 ~ 33.0	165 ~ 240

Check tightness of all fasteners in regular interval. Retighten loose fasteners.