

Kawasaki

Assembly Instructions

Part Number	Description	Model	Approx. Assembly Time
K53001-252	Extended Reach Passenger Seat	Vulcan S MY15-EN650A / EN650B	0.2 hr


Improper installation of this accessory could result in an accident causing serious bodily injury or death. To prevent an accident, be sure that this accessory is properly and securely installed on your vehicle. If you cannot properly install this accessory yourself, have a professional installer, such as an authorized Kawasaki dealer, install it for you.

Prior to each use, check to be sure the accessory is securely attached to the motorcycle and periodically inspect the accessory for any required adjustment, wear, and damage.

Parts List:

Ref. #	Description	Qty
A01	Extended Reach Passenger Seat	1
A02	Bracket	1

Parts Diagram:

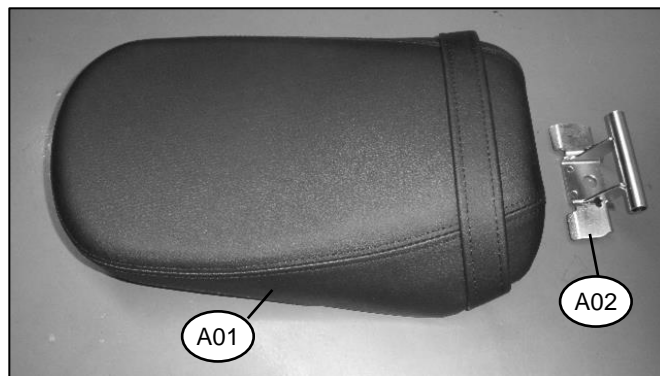


Note: Fitment of this Extended Reach Passenger Seat requires prior installation of Extended Reach Seat (K53001-251) and Passenger Footpegs(99994-0570).

Note: Extended Reach Seat is not compatible with stock front seat.



Installation Instructions:

1. Park the vehicle on level ground and turn off the ignition switch.

2. Remove the rider's seat screw and position the Bracket (A02) over the seat tab as shown, then replace the screw and tighten to 17 Nm (12.5 ft lb).

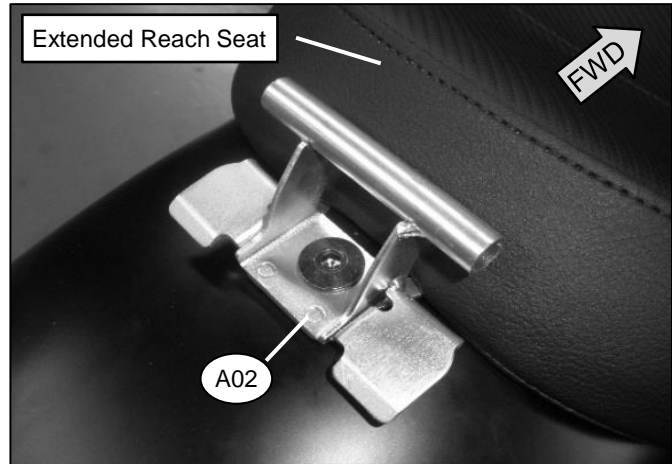

3. Remove the rear fender screw and washer. Install Extended Reach Passenger Seat (A01) by engaging the front seat base tabs onto the bracket (A02), then lower the back of the seat to the fender and install the rear screw and washer. Tighten the screw to 17 Nm (12.5 ft lb). Ensure that the front seat tabs fully engage the bracket (A02).

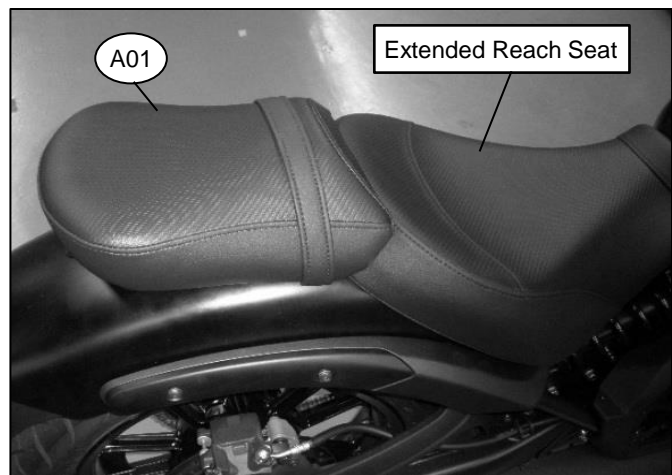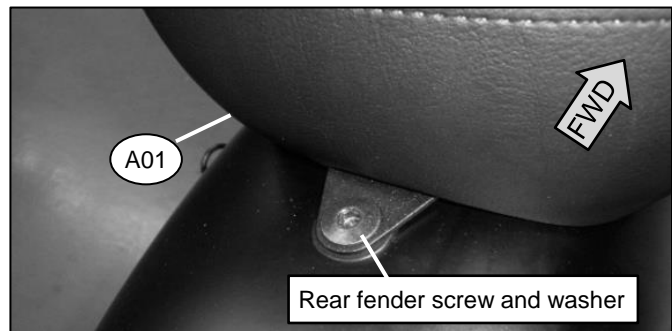

Please check / adjust all screws in regular intervals.